

Modular Roof Mount - Single Pole, Non-penetrating

The non-penetrating modular design is ideal for cell and microwave installations, specially suitable for uneven or flexible roofs.

Modular base allows for endless configurations supporting antenna changes.

Single base size: 32 x 35".


Each base accommodates max no. of 8 concrete blocks of single stack.

Roof mount supports nominal pipe sizes ranging from 2.5" to 4".

This product is a stock item, available same or next day.

MATERIAL

- Steel: CSA G40.21
- Hardware: Gr. 5
- Pipes: HDG Sch40
- Material is hot dip Galvanized after fabrication

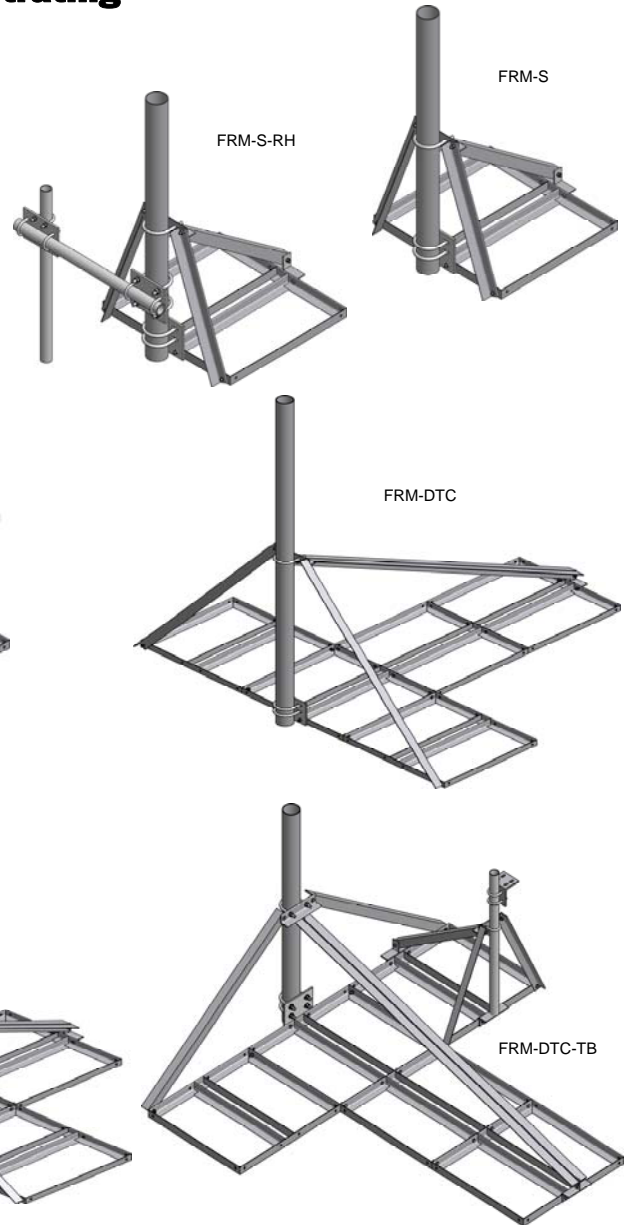

P/N	DESCRIPTION	P/N	DESCRIPTION
FRM-S	Modular Roof Mount: Single (S)	9112-40-HDG	4.5" OD Pipe Sch. 40 HDG
FRM-S-RH	Modular Roof Mount: Re-enforced Single Roof Edge Hanger	9006-40-HDG	4" OD Pipe Sch. 40 HDG
FRM-D	Modular Roof Mount: Double (D)	9008-40-HDG	3.5" OD Pipe Sch. 40 HDG
FRM-T	Modular Roof Mount: Triple (T)	9001-40-HDG	2-7/8" OD Pipe Sch. 40 HDG
FRM-TC	Modular Roof Mount: T-Combination (TC)	9116-40-HDG	2-3/8" OD Pipe Sch. 40 HDG
FRM-TCC	Modular Roof Mount: T-Combination Roof Corner (TCC)	-	U-Bolt Assembly for 4.5" OD Pipe
FRM-DTC	Modular Roof Mount: Dual T-Combination (DTC)	-	U-Bolt Assembly for 4" OD Pipe
FRM-DTC-TB	Modular Roof Mount: Dual T-Combination with Tie-Back (DTC-Tieback)	-	U-Bolt Assembly for 3.5" OD Pipe
		-	U-Bolt Assembly for 2-7/8" OD Pipe